


SR 679 (Bayway Bridge-Structure E) Replacement and Repaving from north of Yacht Club Lane to SR 682 410755-2-52-01

Project Details	
Work Type	Bridge Replacement and Repaving
Phase	Completed
Limits	From north of Yacht Club Lane to SR 682
Project Start	December 2018
Length	2 miles
City	St. Pete Beach St. Petersburg
County	Pinellas
Road	Pinellas Bayway SR 679
Construction Cost	\$56 million
Estimated Completion	Early 2023
Contractor	American Bridge Company

Contact Information	
Project Information	Maddie Pfingsten 727-575-8334 roadwork@dot.state.fl.us
Media Contact	Kris Carson 813-975-6060 Kristen.Carson@dot.state.fl.us

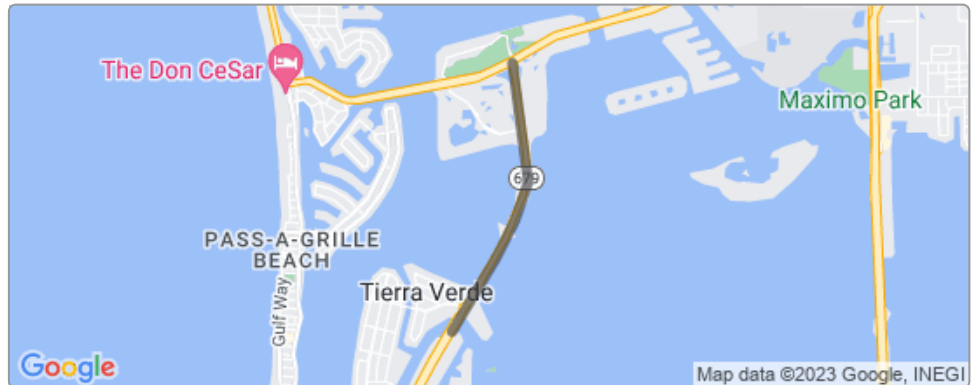

About

As of January 30, 2023, all construction activities associated with this project have been completed.

The design-build project includes replacing the existing two-lane bascule bridge with a two-lane, high-level, fixed bridge (Bayway Structure "E," which is the bridge between Isla Del Sol and Tierra Verde islands), repaving the existing SR 679 roadway between SR 682 and the new bridge, and replacing a seawall south of the bridge along SR 679 in Pinellas County.

The project will also include the construction of a 12-foot-wide shared-use path on the east side and a 5-foot-wide concrete sidewalk on the west side of SR 679. Other improvements include the addition of a round-about at Madonna Boulevard / 1st Street.

- Three projects; 410755-2, 427143-2, 432587-1 have been combined into a single design-build project. This page will serve as the source of information for the entire design-build effort.

The \$56.8 million design-build project is expected to finish early 2023.