




SR 52 Widening and New Alignment between Uradco Place and Fort King Road 435142-1-52-01

Project Details	
Work Type	Widening and New Road Construction
Phase	Completed
Limits	From Uradco Place to west of Fort King Road
Project Start	November 2019
Length	7 miles
City	Dade City San Antonio
County	Pasco
Road	SR 52
Construction Cost	\$84 million
Estimated Completion	Summer 2024
Contractor	Superior Construction Company Southeast, LLC

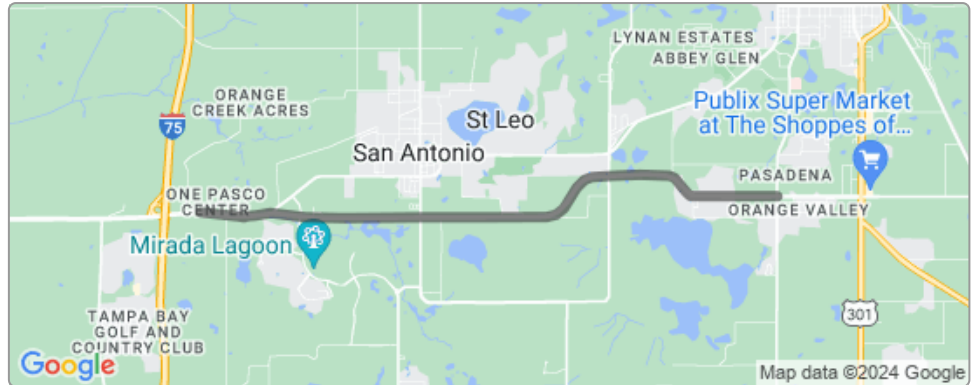

About

As of July 24, 2024, all work was completed and this project was final-accepted from the contractor.

This project widened and realigned SR 52 from Uradco Place to Fort King Road in eastern Pasco County. All work in the original project contract has been completed.

Tasks were added to improve safety and operations -- widening and drainage work was done on westbound SR 52 approaching I-75 to construct a low-profile 4-foot-wide concrete separator between the SR 52 thru-lanes and the lane leading to the southbound I-75 entrance ramp. Milling, repaving, and pavement markings were also done in this area to complete the project.

A development permit - not associated with the project - is installing a traffic signal at Pasco Road.

Original project work:

- Between Uradco Place and Bayou Branch Canal the existing road was widened to a four lane divided roadway.
- East of Bayou Branch Canal, the new alignment of four-lane divided SR 52 was built south of the former SR 52 (now CR 52) tying into Clinton Avenue.
- Clinton Avenue between CR 579 and Fort King Road was widened to a four-lane divided road.

Clinton Avenue between Pasadena Avenue and US 301 is now part of the new SR 52.

The section of the former SR 52 between Bayou Branch Canal (west of Mirada Blvd.) and US 301 is now designated CR 52.

Contact Information	
Project Information	John McShaffrey 813-975-6930 roadwork@dot.state.fl.us
Media Contact	Kris Carson 813-975-6060 kristen.carson@dot.state.fl.us