



I-75 southbound Interchange Improvement at I-4 428957-1-52-01

Project Details	
Work Type	Interchange Improvement
Phase	Completed
Limits	I-75 Southbound Exit Ramp to I-4
Project Start	September 2018
Length	2 miles
City	Tampa
County	Hillsborough
Road	I-4 I-75
Construction Cost	\$15.5 million
Estimated Completion	Spring 2020
Contractor	Prince Contracting, LLC


Contact Information

Project Information

Tyler Matthews 813-975-3560 Tyler.Matthews@dot.state.fl.us

Media Contact

John McShaffrey 813-975-6930 John.McShaffrey@dot.state.fl.us

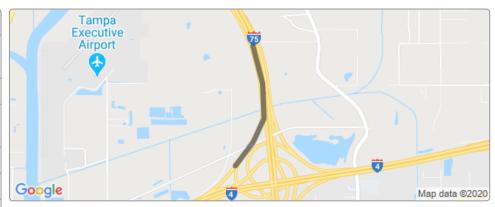

About

All work on the project has been completed. The Florida Department of Transportation accepted this project from the contractor on February 7, 2020 -- **80 days ahead** of contract time!

This project relocated the exit point to I-4 (Exit 261) almost one mile to the north and created a 1.25 mile two-lane ramp that is separated from the mainline travel lanes by guardrail.

The two-lane ramp extends to the previous area where the ramps split to go east or west on I-4. Each ramp lane feeds directly into the existing ramps onto eastbound and westbound I-4, allowing for traffic to get into the correct ramp lane well before the current decision point where the ramp splits to the two directions of I-4.

These improvements will increase safety and traffic flow for southbound I-75 approaching interstate 4.