


I-75 southbound Interchange Improvement at I-4 428957-1-52-01

Project Details	
Work Type	Interchange Improvement
Phase	Completed
Limits	I-75 Southbound Exit Ramp to I-4
Project Start	September 2018
Length	2 miles
City	Tampa
County	Hillsborough
Road	I-4 I-75
Construction Cost	\$15.5 million
Estimated Completion	Spring 2020
Contractor	Prince Contracting, LLC

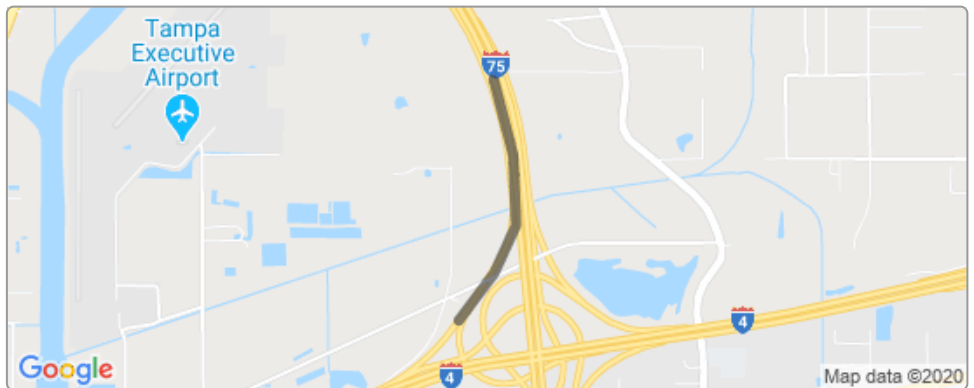

About

All work on the project has been completed. The Florida Department of Transportation accepted this project from the contractor on February 7, 2020 -- **80 days ahead** of contract time!

This project relocated the exit point to I-4 (Exit 261) almost one mile to the north and created a 1.25 mile two-lane ramp that is separated from the mainline travel lanes by guardrail.

The two-lane ramp extends to the previous area where the ramps split to go east or west on I-4. Each ramp lane feeds directly into the existing ramps onto eastbound and westbound I-4, allowing for traffic to get into the correct ramp lane well before the current decision point where the ramp splits to the two directions of I-4.

These improvements will increase safety and traffic flow for southbound I-75 approaching interstate 4.

Contact Information

Project Information

Tyler Matthews
813-975-3560
Tyler.Matthews@dot.state.fl.us

Media Contact

John McShaffrey
813-975-6930
John.McShaffrey@dot.state.fl.us