

I-75 Intelligent Transportation System from Big Bend Road to Progress Boulevard

434027-1-52-01

Project Details	
Work Type	Intelligent Transportation System
Phase	Completed
Limits	From south of Big Bend Road to south of Progress Boulevard
Project Start	April 2019
City	Gibsonton Riverview
County	Hillsborough
Road	I-75
Construction Cost	\$3,891,051
Estimated Completion	Fall 2020
Contractor	TransCore ITS, LLC


Contact Information

Project Information

Salem Dhouib 813-612-3300 Salem.Dhouib@dot.state.fl.us

Media Contact

Kris Carson 813-975-6060 Kristen.Carson@dot.state.fl.us

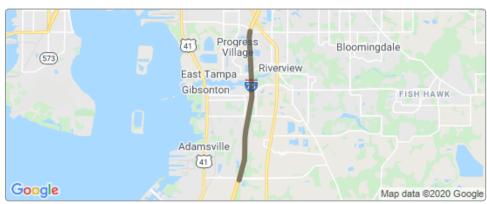

About

COMPLETION DATE: 10/31/20

This \$3.9 million design-build project will install an Intelligent Transportation System components along I-75 from south of Big Bend Road to south of Progress Boulevard including nine miles of fiber optic cable, eleven closed-circuit television cameras, and eleven Microwave Vehicle Detection units in Hillsborough County.

An Intelligent Transportation System, or ITS, uses a variety of devices including electronic roadway signs, (called dynamic message signs) and closed-circuit television cameras to monitor roadway congestion, lane closures, and current weather or emergency conditions and advise motorists of travel times.

Construction is anticipated to finish fall of 2020.

Last Updated: 11/02/2020