


I-75 Interchange Improvements at CR 672 (Big Bend Road) 424513-3-52-01

Project Details	
Work Type	Interchange Improvements
Phase	Construction
Limits	I-75 at CR 672 (Big Bend Rd)
Project Start	December 6, 2021
City	Apollo Beach Riverview
County	Hillsborough
Road	Big Bend Road I-75
Construction Cost	\$81.7 million
Estimated Completion	Summer 2025
Contractor	Skanska USA Civil Southeast, Inc.

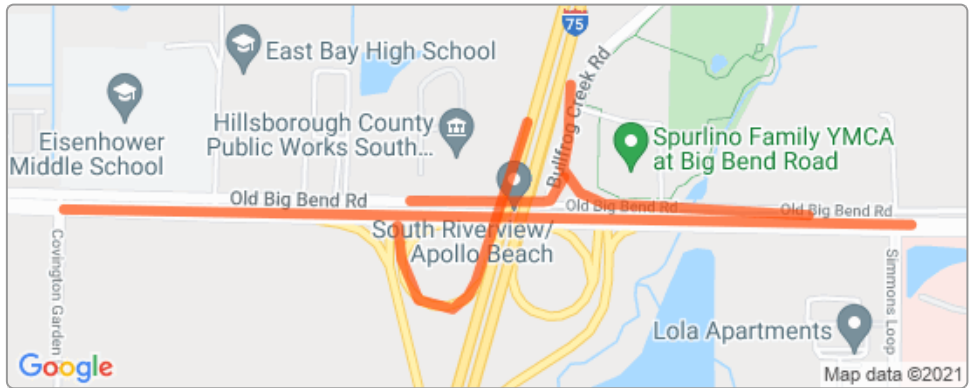

About

Due to the rapid growth in the South County area, the Florida Department of Transportation has partnered with Hillsborough County to develop long-term solutions to help alleviate traffic congestion by reconstructing the I-75 interchange at CR 672 (Big Bend Road) Exit 246.

Improvements on this design-build project include:

- adding a new northbound I-75 entrance ramp from westbound Big Bend Road
- adding a new southbound I-75 exit ramp to westbound Big Bend Road
- increasing the storage area at the base of the northbound I-75 exit ramp by adding a left-turn lane onto westbound Big Bend Road
- extending the southbound I-75 exit ramp lane approaching Big Bend Road and adding dual right-turn lanes to westbound Big Bend Road
- adding a triple right-turn lane controlled by a signal from the southbound I-75 exit ramp to eastbound Big Bend Road
- adding signalized dual left-turn movements from westbound Big Bend Road to southbound I-75 and eastbound Big Bend Road to northbound I-75
- widening Big Bend Road between Covington Garden Drive and Simmons Loop from a 4-lane divided road to 6 lanes featuring enhanced pedestrian, bicycle, and bus facilities
- rebuilding the Old Big Bend Road and Big Bend Road bridges

Contact Information	
Project Information	Maricelle Venegas 813-975-6204 RoadWork@dot.state.fl.us
Media Contact	Kris Carson 813-975-6060 Kristen.Carson@dot.state.fl.us

For more information on this project, or to sign-up to receive construction updates and traffic alerts, please visit [FDOTtampabay.com](https://www.fdot.com/tampabay) (Project Number: 424513-3-52-01)