Operational Freight Improvements in Hillsborough and Pasco counties 254677-4-13-92

Project Details	
Work Type	Operational Improvements
Phase	Completed
Limits	5 Locations in Hillsborough and Pasco counties
Project Start	February 2020
City	Dade City New Port Richey Plant City Tampa Thonotosassa
County	Hillsborough Pasco
Road	SR 39 SR 54 SR 60 US 301 US 98
Construction Cost	\$597,304
Estimated Completion	Summer 2020
Contractor	Ajax Paving Industries of Florida, LLC

Contact Information


Project Information

Randall Aebersold 727-575-8300

Randall.Aebersold@dot.state.fl.us

Media Contact

Kris Carson 813-975-6060 Kristen.Carson@dot.state.fl.us

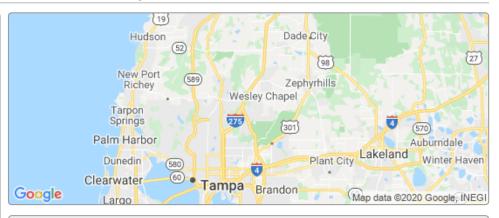

About

THIS PROJECT WAS FINAL ACCEPTED ON AUGUST 19, 2020

This design-build project will provide operational improvements by modifying the turning radii for freight trucks at five locations in Hillsborough and Pasco counties.

Type of modifications and locations:

SR 54 at Merchant Avenue in Pasco County:
 Modifying the median by extending the length of the eastbound turning radius from southbound Merchant Avenue onto eastbound SR 54.

To expedite this work, left-turn movements from Merchant Avenue onto SR 54 will be restricted for approximately 30 days, weather permitting.

- <u>US 301 at Mango Road</u> in Hillsborough County: Improving the curve radius from northbound US 301 onto southbound Mango Road.
- US 98 at Old Lakeland Highway Frontage Road in Pasco County: Improving the curve radii from northbound Old Lakeland Highway Frontage Road onto eastbound US 98 and from westbound US 98 onto southbound Old Lakeland Highway Frontage Road.
- <u>SR 60 at Bayport Drive</u> in Hillsborough County: Modifying the striping and curve radius at northwest and southwest corners of SR 60 at Bayport Drive.
- <u>SR 39 at SR 39A</u> in Hillsborough County: Constructing a raised island in the median and adding a paved bulb-out for freight trucks making a northbound U-turn at this intersection.

Construction activities and lane closures will occur nightly from 8 p.m. to 6 a.m.

Construction is expected to finish during the summer of 2020.

Last Updated: 08/21/2020