




I-75/Gibsonton Drive Diverging Diamond Interchange (DDI) 437650-2-52-01

Project Details

Work Type	Interchange Modification - Add Lanes
Phase	Design
Limits	From south of Gibsonton Drive to north of Riverview Drive
Length	4.3 Miles
City	Gibsonton Riverview
County	Hillsborough
Road	I-75
Design Cost	\$6.2M

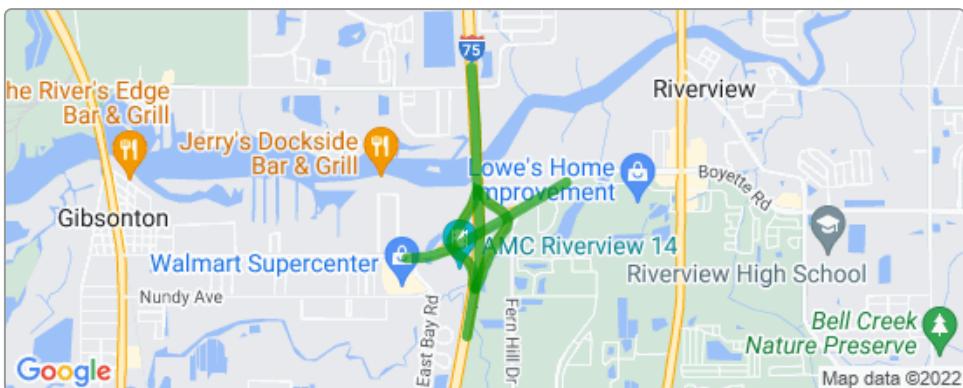

About

This project will modify the existing diamond interchange of I-75 and Gibsonton Drive into a Diverging Diamond Interchange (DDI).

As part of this modification:

- Add a deceleration lane along northbound I-75 and widen the existing northbound exit to Gibsonton Drive to 2-lanes
- Provide separate on-ramps for eastbound and westbound Gibsonton Drive to northbound I-75. The on-ramp from westbound Gibsonton Drive will be converted to a 2-lane on-ramp and be built on a separate bridge structure over the Alafia River with an acceleration lane extending along northbound I-75 to north of Riverview Drive
- Convert the existing southbound I-75 exit to Gibsonton to two lanes
- Widen Gibsonton Drive from west of New East Bay Road to east of Fern Hill Drive

****This project is currently not funded for construction****