FDOT Tampa Bay
Florida Department of Transportation

SR 56 New Roadway Extension from Meadow Pointe Blvd to US 301 434765-1-52-01


Project Details

Work Type	New Roadway Project
Phase	Completed
Limits	Meadow Pointe Boulevard to US 301
Project Start	February 2017
Length	6 miles
City	Wesley Chapel Zephyrhills
County	Pasco
Road	SR 56
Construction Cost	$60 million
Estimated Completion	Late 2019
Contractor	Cone & Graham, Inc.

Contact Information

Project Information
Greg Deese, P.E.
813-975-3563
gregory.deese@dot.state.fl.us

Media Contact
Kayla Mejia
813-975-6060
Kayla.Mejia@dot.state.fl.us

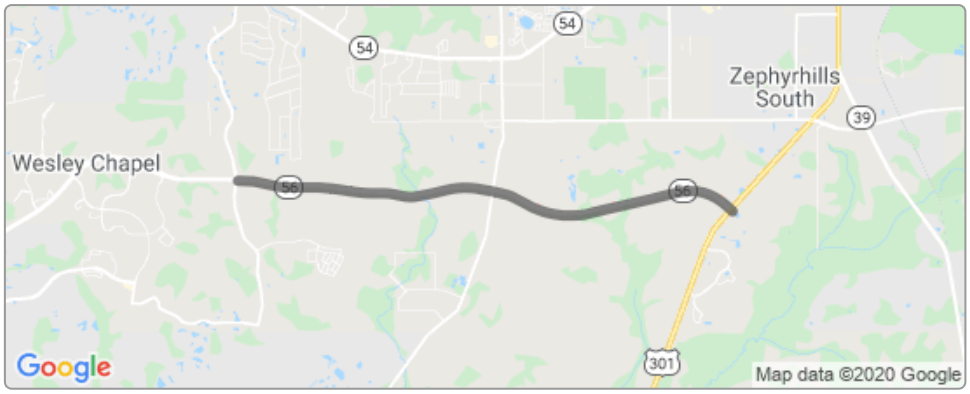

About

THIS PROJECT WAS ACCEPTED ON NOVEMBER 25, 2019.

Cone and Graham, Inc., on behalf of the Florida Department of Transportation, began construction on the $60 million extension of SR 56 between Meadow Pointe Blvd and US 301 in southeastern Pasco County in February 2017.

The new six-mile long, four-lane divided roadway includes a ten-foot wide multi-use trail on the south side of the road, a five-foot wide sidewalk on the north side of the road and seven-foot wide bicycle lanes on the shoulders in each direction.

There are new signalized intersections on Morris Bridge Road where the new SR 56 crosses it and on US 301 where the new SR 56 ties into it.