FDOT Tampa Bay
Florida Department of Transportation

SR 60 (Adamo Drive) Intersection Freight Improvements at N 34th Street 437304-5-14

Project Details


Work Type	Freight Improvements
Phase	Completed
Limits	SR 60 (Adamo Dr) at 34th Street
Project Start	Summer 2021
City	Tampa
County	Hillsborough
Road	SR 60
Construction Cost	$273,390.50
Estimated Completion	Summer 2022
Contractor	Cone & Graham, Inc.

Contact Information

Project Information
Randy Aebersold
727-575-8300

Randall.Aebersold@dot.state.fl.us

Media Contact
Kayla Mejia
813-975-6060
Kayla.Mejia@dot.state.fl.us

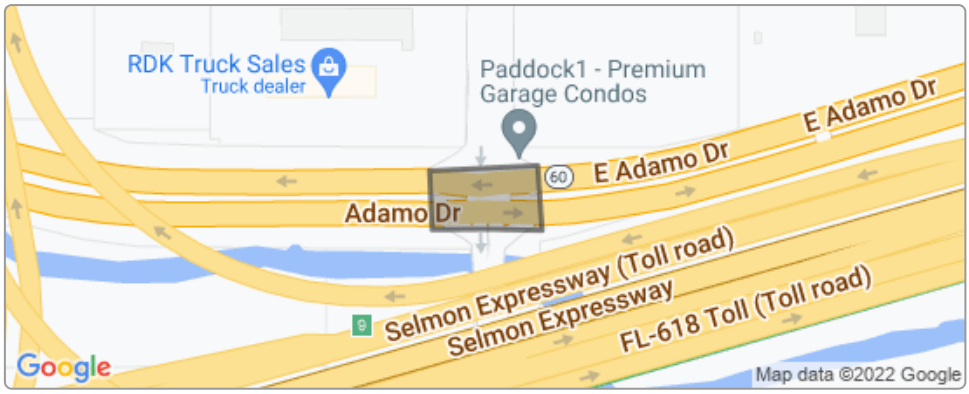

About

All construction activities associated with this project were completed on July 16, 2022.

This project provides operational improvements by modifying the turning radius for freight trucks at the intersection of SR 60 (Adamo Drive) and N. 34th Street in Hillsborough County.

Construction activities included:

- extending the southbound turning radius from N. 34th Street onto eastbound SR 60 (Adamo Drive)
- modifying traffic separator on N. 34th Street
- adding curb return radius, sidewalk, curb ramp and crosswalk to accommodate pedestrian traffic
- installing signs and pavement markings