FDOT Tampa Bay
Florida Department of Transportation

Downtown Tampa Interchange (I-275/I-4) Safety and Operational Improvements

445057-1-52-01


Project Details	
Work Type	Interchange Improvements
Phase	Construction
Project Start	Fall 2023
City	Tampa
County	Hillsborough
Road	I-275 I-4
Construction Cost	$227.5 million
Estimated Completion	Spring 2027
Contractor	The Lane Construction Corporation

Contact Information

Project Information
Maricelle Venegas
813-975-6204

Maricelle.Venegas@dot.state.fl.us

Media Contact
Kayla Mejia
813-975-6060
Kayla.Mejia@dot.state.fl.us

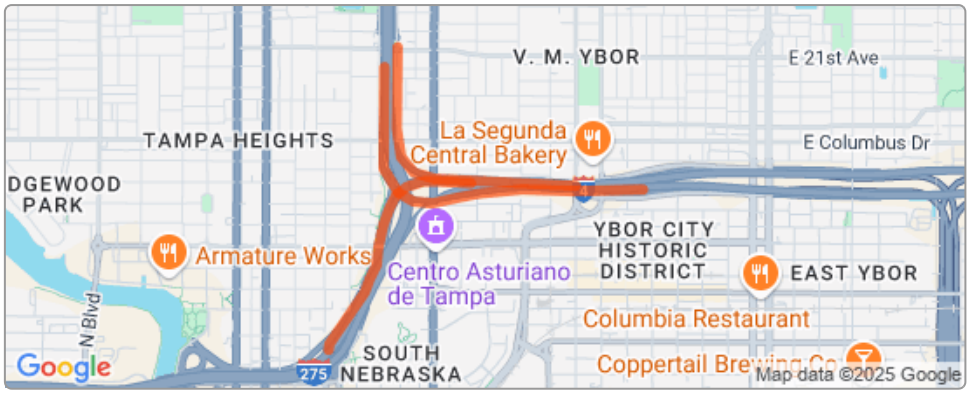

About

The Downtown Tampa Interchange project will improve the safety and operations of the I-275/I-4 interchange in Tampa. Improvements include:

Southbound I-275 to Eastbound I-4

- Providing a two-lane exit and constructing a new exit ramp bridge (to the inside of the interchange) from SB I-275 to EB I-4
- Changing the EB exit ramp from I-4 to Ybor City by relocating access to14th/15th Streets instead of 21st/ 22nd Streets
- Widening the existing EB I-4 frontage road (13th Avenue) to two lanes

Westbound I-4 to Northbound I-275

- Widening the existing single lane ramp from WB I-4 to NB I-275 to two lanes
- Adding an additional merge lane on NB I-275 between I-4 and the Dr. Martin Luther King Jr. exit to the west of the current alignment

Westbound I-4 to Southbound I-275

- Widening the existing two-lane ramp from WB I-4 to SB I-275 to three lanes
- Widening the shoulders on SB I-275 between Palm Avenue and Jefferson Street
- Shifting the exit ramp from SB I-275 into downtown Tampa to the west of the current alignment

For more information on this project, or to sign-up to receive construction updates and traffic alerts, please visit FDOTtampabay.com (Project Number: 445057-1-52-01)

Last Updated: 10/29/2026