FDOT Tampa Bay
Florida Department of Transportation

I-4 Truck Parking Facility 448698-1-52-01

Project Details


Work Type	Truck Parking Facility
Phase	Construction
Project Start	September 20, 2025
City	Plant City
County	Hillsborough
Road	County Line Road I-4
Construction Cost	$29.4 million
Estimated Completion	Early 2027
Contractor	Ajax Paving Industries of Florida, LLC

Contact Information

Project Information
Maricelle Venegas
813-975-6204

Maricelle.Venegas@dot.state.fl.us

Media Contact
Kayla Mejia
813-975-6060
Kayla.Mejia@dot.state.fl.us

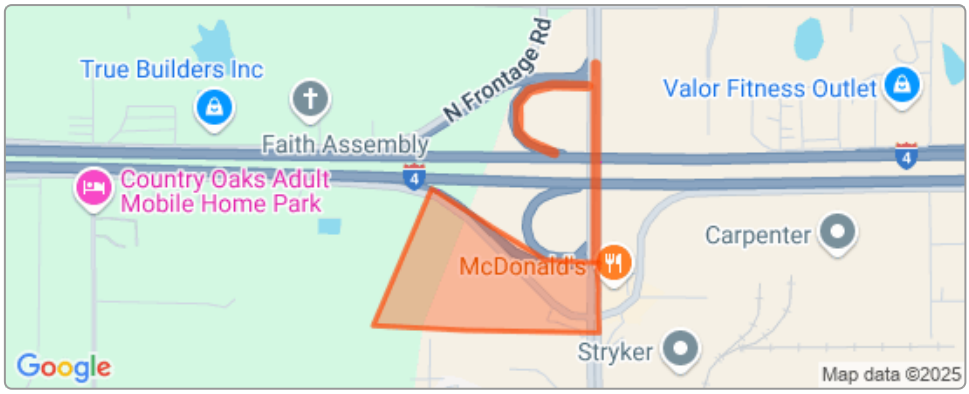

About

The FDOT is constructing a new I-4 Truck Parking Facility at the southwest corner of the I-4 and County Line Road interchange in Hillsborough County.

The new I-4 Truck Parking Facility is being built on a 49-acre FDOT-owned site and will provide 160 truck parking spaces.

The new facility will be integrated into Florida's Truck Parking Availability System (TPAS) to provide drivers with real-time parking availability information via a mobile application and dynamic roadside signs.

Improvements include:

- Replacing the traffic signal and providing dual right and left turn lanes from the eastbound I-4 exit ramp onto County Line Road.
- Adding a traffic signal and providing dual right and left turn lanes from the westbound I-4 exit ramp onto County Line Road.
- Reducing the radii and adding truck aprons to accommodate trucks.
- Modifying traffic signals and reconfiguring travel lanes along County Line Road to reduce truck delays and improve mobility.
- Installing new signage and pavement markings, highway lighting, and ITS systems.
- Installing a 175-foot pole, displaying an 80 x 50-foot American flag and a 30 x 20-foot state of Florida flag

For more information on this project, or to sign-up to receive construction updates and traffic alerts, please visit FDOTtampabay.com (Project Number: 448698-1-52-01)

Last Updated: 10/27/2026